



产品介绍 Product description

RTD-E型单卡板式修补器

RTD-E Single plate-type pipeline repair clamp

产品特性:

RTD-E系列适用于修复因老化、锈蚀引起的销孔及断钉。可在压力下密封，无需更换管道。具有安全的优点。方便快捷，无需任何其他工具即可安装。该方法具有通用性强，对管弧的椭圆度有一定的要求。


Product characteristics:

RTD-E series is good at repairing pin holes and breaks caused by aging or rusting, which can seal under pressure and no need of changing pipes. Have advantages of safe, convenient and efficiency, can be installed without any other tools. It is highly optimized for general use and has few requirements on the ellipticity of pipe arc.


产品材质 Product material

外壳 Shell	不锈钢 Stainless steel	AISI304/AISI316L/AISI316Ti
密封圈 Seal ring	三元乙丙 (EPDM)	适用温度: -30℃至+130℃ 介质: 可用于各种水、废水、空气、固体和化学品 Applicable temperature: -30℃ to +130℃ Medium: It can be used in various water quality, wastewater, air, solid and chemicals.
	丁腈 (NBR)	适用温度: -25℃至+100℃ 介质: 可用于气体、煤油、油、燃料及多种碳氢化合物 Applicable temperature: -25℃ to +100℃ Medium: It can be used for gas, coal gas, oil, fuel and various hydrocarbons.
	另: 可选配氟化丁腈橡胶 (HNBR) 硅橡胶 (MVQ) 和氟橡胶 (VITON A) Additionally: optional HNBR, MVQ, VITON A	
紧固件 Fastening	防腐达克罗处理重载荷螺栓、轴销，也可选配不锈钢、聚四氟乙烯配件 Anti-corrosion Dacromet treatment of heavy-duty bolts, pins, stainless steel, PTFE accessories can also be selected	

产品规格 Product specifications

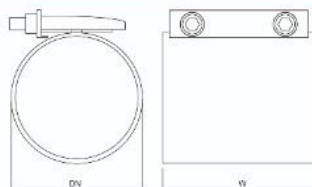

管径范围 150mm-800mm	RTD-E	工作压力 Mpa
	●	1.6
59 - 67	●	1.6
65 - 73	●	1.6
69 - 76	●	1.6
75 - 83	●	1.6
88 - 94	●	1.6
108 - 118	●	1.6

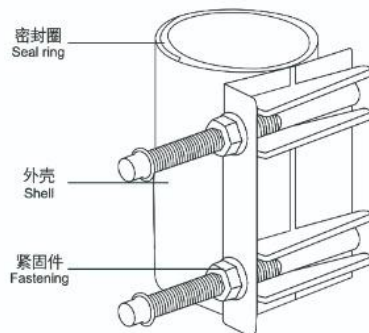

产品介绍 Product description

RTD-F型双卡板式修补器

RTD-F Double plate-type pipeline repair clamp

产品特性:

RTD-F系列适用于修复因老化、锈蚀引起的销孔及断钉。可在压力下密封，无需更换管道。具有安全的优点。方便快捷，无需任何其他工具即可安装。该方法具有通用性强，对管弧的椭圆度有一定的要求。


Product characteristics:

RTD-F series is good at repairing pin holes and breaks caused by aging or rusting, which can seal under pressure and no need of changing pipes. Have advantages of safe, convenient and efficiency, can be installed without any other tools. It is highly optimized for general use and has few requirements on the ellipticity of pipe arc.

产品材质 Product material

外壳 Shell	不锈钢 Stainless steel	AISI304/AISI316L/AISI316Ti
密封圈 Seal ring	三元乙丙 (EPDM)	适用温度: -30℃至+130℃ 介质: 可用于各种水、废水、空气、固体和化学品 Applicable temperature: -30℃ to +130℃ Medium: It can be used in various water quality, wastewater, air, solid and chemicals.
	丁腈 (NBR)	适用温度: -25℃至+100℃ 介质: 可用于气体、煤油、油、燃料及多种碳氢化合物 Applicable temperature: -25℃ to +100℃ Medium: It can be used for gas, coal gas, oil, fuel and various hydrocarbons.
	另: 可选配氟化丁腈橡胶 (HNBR) 硅橡胶 (MVQ) 和氟橡胶 (VITON A) Additionally: optional HNBR, MVQ, VITON A	
紧固件 Fastening	防腐达克罗处理重载荷螺栓、轴销，也可选配不锈钢、聚四氟乙烯配件 Anti-corrosion Dacromet treatment of heavy-duty bolts, pins, stainless steel, PTFE accessories can also be selected	

产品规格 Product specifications

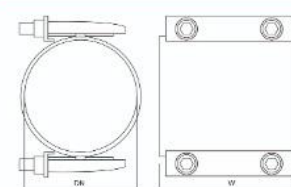

管径范围 150mm-800mm	RTD-F	工作压力 Mpa
	●	1.6
59 - 67	●	1.6
65 - 73	●	1.6
69 - 76	●	1.6
75 - 83	●	1.6
88 - 94	●	1.6
108 - 118	●	1.6

